
Power Tech Fully Automatic Centering and Plunge Facing Machine

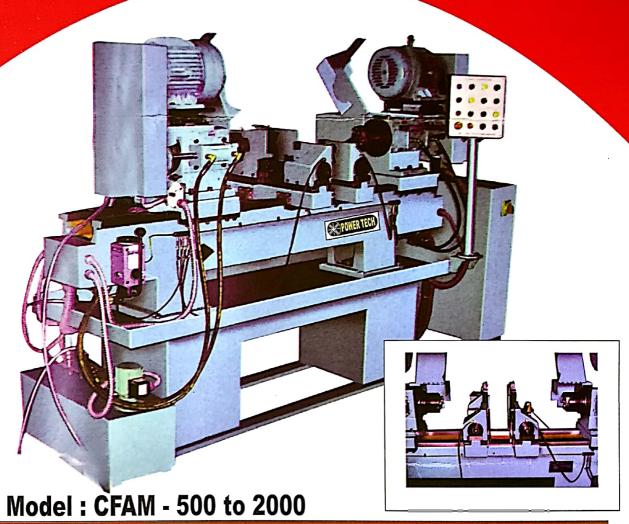

TECHNICAL DATA:

1. Possible work-Piece Length:

with One Vice Min.

40 mm

with Two Vices Min.

110mm

50 mm

with Two Vices Max.

500/1000/1500/2000 mm

2. Min. Work-Piece dia, admitted in vices 12 mm

Max. Work-Piece dia. admitted in vices 125 mm

4. Clamping System

Hydraulic Motor

Spindle Speeds

350/500/750/1000 RPM

Max. Stroke of each Quill

7. Quill Feed (infinitely variable) Hydraulic

8. Max. Plunge Facing Diameter 63 mm

9. Center Drill Sizes

BSS3 to BSS6 or equivalent as per ISI

10. Motor Power:

Spindle Motor (each)

2.2 kw / 960 RPM

Hydraulic Power Pack

3 kw / 1440 RPM

Coolant Motor

0.1 kw / 2800 RPM

Total Power

7.5 kw

Mfg. by:

W Western Hydromovers

Works: 4, Sayaji Estate, Dehliwali Chali, Opp. Fruit Market, Nr. Petrol Pump, Naroda Road. Ahmedabad-380 025. Email: western_hydro68@yahoo.in_M.: 98251 50566, 81281 92426

Western Hydromovers



Works: 4, Sayaji Estate, Dehliwali Chall, Opp. Fruit Market, Nr. Petrol Pump, Naroda Road, Ahmedabad-380 025.

Email: western_hydro68@yahoo.in

M: 98251 50566, 81281 92126

Latest Technology for Key-way Milling Smooth Operation work with L.M. Guideways **Motion System**







TECHNICAL SPECIFICATIONS:

MODEL	WH-150/200
SPINDLE RPM	1800 rpm
SHAFT CLAMPING DIA	12mm - 70mm
LENGTH OF KEY-WAY	5mm - 150/200mm
KEY-WAY SIZE	3mm - 12mm
STANDARD COLLET	ER - 20
POWER REQUIRED	1HP / 0.75 kw

